



PL350HD

50 TONS CLASS ELECTRICAL LOADER

Standard Reach:

45 feet


(Y or S booms)



Tanguay support: Experienced engineering people working with you during mill investment planning to optimize mill layout and loader configuration to maximize production.
On-site operator and technician training including full documentations.


SINGLE BASE

Mount on concrete base




DOUBLE BASE


Mount over conveyor, road or rail



RAIL

Trolley Mount

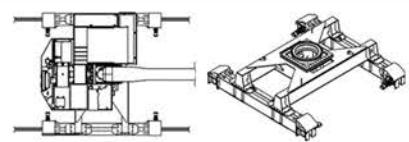

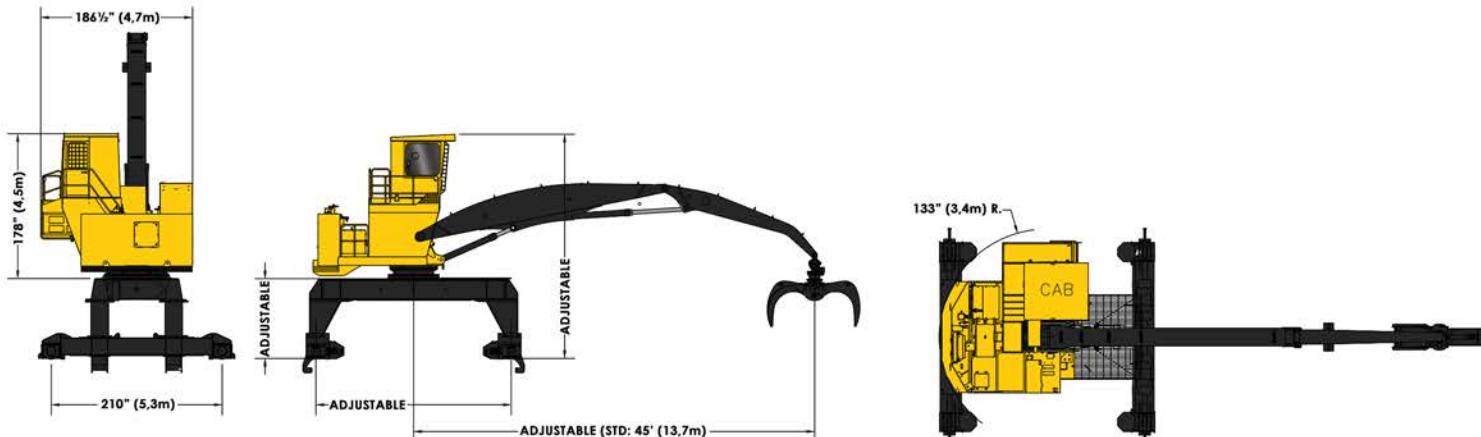

Tanguay Machinery reserve the right to change specifications without notice or obligation. Product illustrations may be equipped with non-standard equipment.

Power Supply

- Totally enclosed 150 HP (112 kW) to 200 HP (150 kW) fan cooled electric motor (TEFC), 1775 rpm, 3 phases, 60 cycles.
- Moisture resistant windings corrosion resistant epoxy finish.
- Power supply wiring package available for U.S. (440 V) and Canadian (575 V) electric services.
- Heavy-duty and weatherproof electric controls panel including heavy-duty transformer, fuses and wiring.
- Transformer supplies: 240 V for cab heater, 120 V for hydraulic oil heater and 24 V for lights, windshield wiper, etc.

Hydraulics

- One variable displacement piston pump.
- Total flow of 130 gpm (500 L/min).
- Operating pressure: 4000 psi (27580 kPa).
- Oversized hydraulic oil cooler with reversible fan.
- One full flow return and 1 case drain line filter with restriction indicators (5 micron).
- Oil tank immersion heater, 120 V.
- Hydraulic system test points.
- Hydraulic tank oil level gauge.
- Electro proportional joystick

Work Station

- Large 72" x 60" rear entry cab engineered for the safety and comfort of the operator.
- Mill Operator Station: Plenty of room for additional monitors and controls
- Handrails and stairs provide easy cab access.
- Visibility is excellent due to the height of the cab and ample windshield area.
- Cab with A/C and heater, front protective screen, side windows, side escape window, wiper and Am-Fm-Bluetooth radio
- Complete instrument panel including MD4 control display with hydraulic oil temperature, low hydraulic oil level alarms, starter switch, dome light and working light switches.
- Electro proportional joystick controls with IQAN control system for smooth and fast boom and grapple functions and possibility to limit working zones to protect sensitive areas.

Swing

- Rotation on a 55 in. (1397 mm) turntable bearing with internal gear and two planetaries.

Options

- Hydraulic refill pump
- Vacuum pump
- Auto Lube system
- Customized access catwalk depending on the application

Booms

- Lift capacity : 19500 lbs (8 845 kg) @ 30 feet (9,14m)
- Boom designed to suit your mill application from chips to long logs.
- Also available for scrap yard or general material handling.

